Foot Control Installation Guide

FOOT CONTROL INSTALLATION

(1) Depress BASE UP button (A, Figure 1) on touch pad (1) ***[located on side of chair]*** to raise chair as high as it will go.

WARNING!
Always disconnect power cord before removing shrouds or covers. Failure to comply could result in serious personal injury or death.

(2) Unplug power cord from outlet.

(3) Remove three screws (2) and hydraulic cover (3).

(4) Route foot control cord (4) under back of chair; then secure restraint bracket (5) to chair base using screw (6).

(5) Plug foot control cord (4) into J1 connector (B) on PC board (7).

(6) Plug power cord into outlet and check for proper operation.

(7) Replace hydraulic cover (3) and secure with three screws (2).

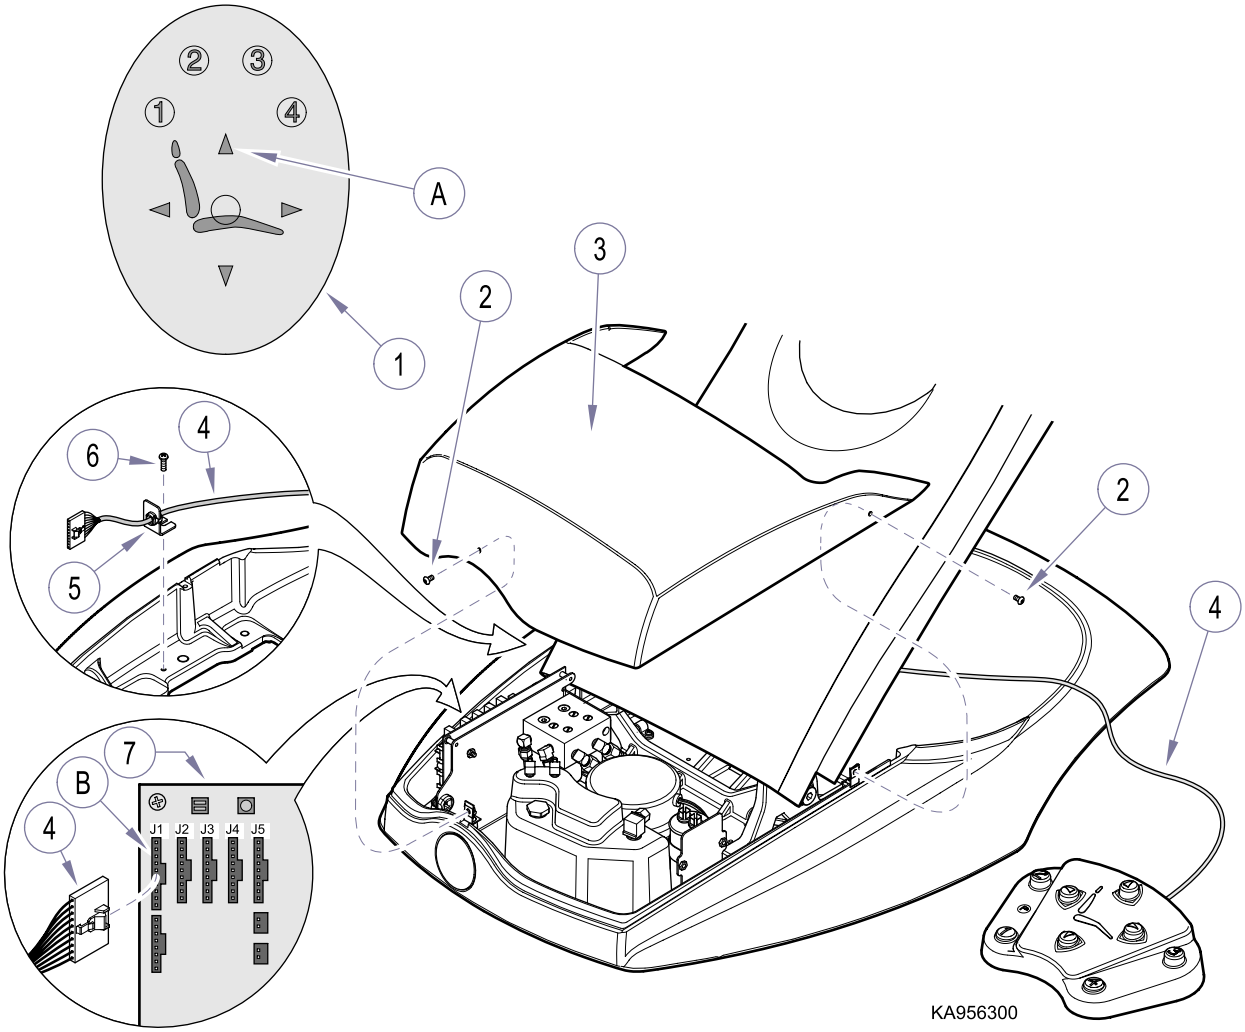

Figure 1. Foot Control Installation

© Midmark Corporation 2000